

Schlüter®-REMA

Tile magnets
for concealed access panels

11.1

Product data sheet

Application and Function

Schlüter-REMA is the ideal system for creating concealed access panels in tiled wall coverings.

Schlüter-REMA's installation is independent of tile size and thickness and enables exact matching of the access panel to the overall joint design. Thus, panels that access electrical or plumbing components, for example, do not spoil the visual appearance of the tiles.

Material


Schlüter-REMA assembly kit consists of four aluminium brackets with moulded casings containing magnets clamped to lateral, moveable guide shoes, and four ferromagnetic metal counterplates.



Material properties and areas of application

Schlüter-REMA is suited for creating concealed access panels in wall coverings. If the access opening is substantially larger than 30 cm x 30 cm, it may be necessary to install two additional magnets.

In special cases, the suitability of Schlüter-REMA must be verified, based on anticipated chemical, mechanical, and/or other stresses.

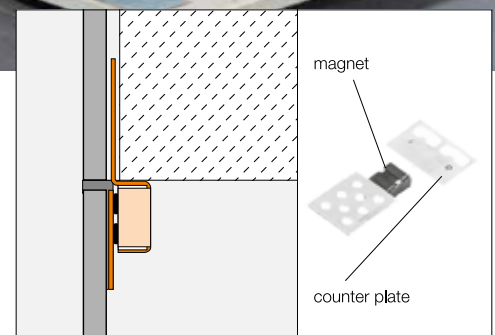



Installation

1. Adhere the tile magnets (1) to the back of the wall tile with tile adhesive. The magnets must fully extend over the edge of the tile into the opening.
2. Set the wall tiles with the adhered magnets at the edges of the opening so that four magnets protrude into the opening.
3. Use silicone to adhere the counter-plates (2) to the back of the cover, matching the position of the magnets.
- 3a. For larger openings, create a cover from the respective number of tiles by joining them with a tile adhered to the rear.
4. Once the silicone has properly cured, set the cover panel in place and close the perimeter joint with sealant compound in a matching colour.

Maintenance

Schlüter-REMA does not require any special maintenance.

Text template for tenders:

Supply


_____ Piece(s) Schlüter-REMA as an assembly kit for concealed access panels, consisting of four aluminium brackets with moulded casings containing magnets clamped to lateral, moveable guide shoes, and four ferromagnetic metal counter-plates, and install according to manufacturer's installation instructions.

Art.-No.: _____

Material: _____/Piece

Labour: _____/Piece

Total: _____/Piece

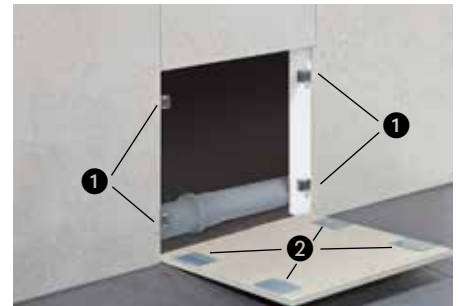

Product Overview

Schlüter®-REMA

Set
4 magnets + 4 counter plates